


Banqueting Range

Model: MHC10, MHC16 & MRC16 - Datasheet

Key Features

- Foodsafe stainless steel exterior and interior
- Radiused, easy clean, interior based corners to reduce potential dirt traps
- CoolSmart controller is designed for easy operation and features clear digital display
- Designed and engineered to operate efficiently up to a 43°C ambient, this exceeds Climate Class 5
- Self closing doors minimises temperature gain, reducing energy consumption
- Precision injected, high density 75mm polyurethane insulation. Provides excellent thermal efficiency with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential)
- Cabinet designed and fitted with heavy-duty, non-marking swivel castors with brakes to front, to enable easy positioning and mobility
- Barrel locked doors for added security

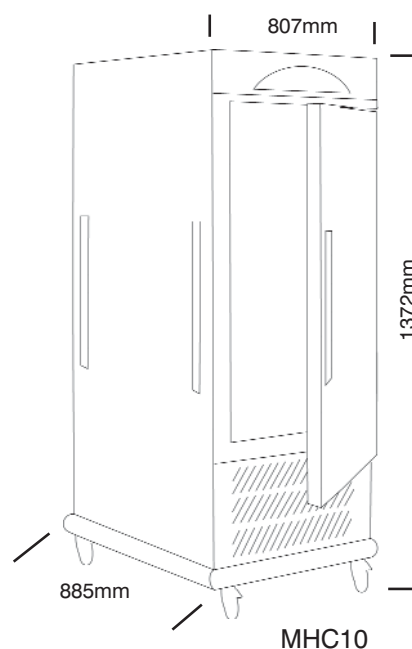

- Built in handles at side for easy mobility
- All round bumper for added protection during transfer of cabinet
- Transports quantities of food from kitchen to servery/banqueting area
- MHC: Hot food remains in first class condition with minimal dehydration
- MHC: Designed to keep food hot above 70°C for up to 4 hours after switching off

Variant	Temp	Storage
MHC10	+78/+82°C	Heated
MHC16	+78/+82°C	Heated
MRC16	+1/+4°C	Refrigerated

Dimensions

	MHC10	MHC16	MRC16
External (mm):	H1372 W807 D885	H1770 W807 D885	H1994 W807 D885
Internal (mm):	H925 W587 D653	H1322 W587 D653	H1230 W587 D635
Door Opening (mm):	D1477	D1477	D1477
Packed:	H1510 W820 D900	H1910 W820 D900	H2125 W900 D820
Weight: Add 5kg per product for packaging	108kg	145kg	135kg

Important Information

	MHC10	MHC16	MRC16
Capacity: cu.ft/litres	13.77/390	19.4/549	17.5/495
Construction			
Exterior	0.7mm stainless steel	0.7mm stainless steel	0.7mm stainless steel
Interior	0.6mm stainless steel	0.6mm stainless steel	0.6mm stainless steel
Door	0.8mm stainless steel ext 0.6mm stainless steel int	0.8mm stainless steel ext 0.6mm stainless steel int	0.8mm stainless steel ext 0.6mm stainless steel int
Power Supply	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug
Power Input			
Start Up	N/A	N/A	10.7 amps
Running	5.75 amps	11.5 amps	2.5 amps
Compressor HP	N/A	N/A	1/4
Energy Consumption (Tested to EN153) in 24hrs	Unavailable at present	Unavailable at present	3.6kW
Heat Rejection (Evaporating at -10°C in 32°C ambient)	N/A	N/A	565 watts
Refrigerant	N/A	N/A	R134a
Defrost	N/A	N/A	Auto off- cycle
Insulation ODP Zero Polyurethane	75mm	75mm	75mm
Noise Output	N/A	N/A	52.0dBA
Fittings			
Trayslides	10	16	16

Please note that 2/1 GN trays hold 2 x
12" plates = 32 plates per unit



Bryggen Road, North Lynn Industrial Estate
King's Lynn, Norfolk PE30 2HZ

T +44 (0) 1553 817000

F +44 (0) 1553 817111

Spares +44 (0)1553 817017

E info@williams-refrigeration.co.uk

W www.williams-refrigeration.com

Allow minimum of 500mm above cabinet for maintenance and ventilation. All refrigeration equipment requires adequate ventilation for efficient and effective performance. Williams are committed to a policy continuing product development and innovation and as such, we reserve the right to change product specifications stated without prior notice.

V5 - July 2010