


UBC Range

Model: UBC5, UBC7 & UBC20 - Datasheet



UBC5

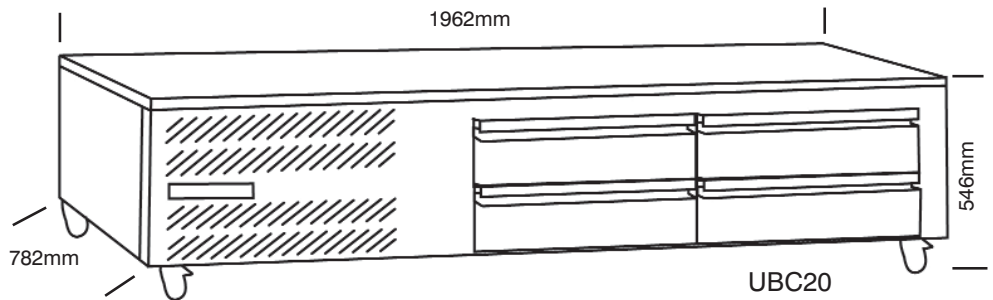

UBC20

Key Features

- Foodsafe stainless steel exterior and interior
- Radiused, easy clean, interior base corners reducing potential dirt traps
- CoolSmart controller is designed for easy operation and features clear digital display
- Designed and engineered to operate efficiently up to a 43°C ambient, this exceeds Climate Class 5
- Removable refrigeration cassette system for easy servicing
- Precision injected, high density 75mm polyurethane insulation. Provides excellent thermal efficiency with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential)
- Heavy duty, low level, non-marking swivel castors with brakes – designed to fit through a standard door for ease of positioning

- Space saving solution - designed to accommodate 600mm or 900mm chargrills and griddles depending on model
- Can be connected to a Williams temperature monitoring TAB system

Variant	Temp	Storage
UBC5	+1/+4°C	General Produce
UBC7	+1/+4°C	General Produce
UBC20	+1/+4°C	General Produce

Options

- Helicoil cable

Dimensions

	UBC5	UBC7	UBC20
External (mm):	H600 max W1000 D782	H546 W1300 D782	H546 W1962 D782
Internal (mm):	H399 W587 D683	H345 W587 D683	H345 W1249 D683
Drawer Opening (mm):	D1407	D1407	D1407
Packed:	H963 W1050 D823	H963 W1350 D823	H963 W2012 D823
Weight: Add 5kg per product for packaging	100kg	130kg	160kg

Important Information

	UBC5	UBC7	UBC20
Capacity: GN Containers	2 x 2/1 or 4 x 1/1 (75mm deep)	2 x 2/1 or 4 x 1/1 (75mm deep)	4 x 2/1 or 8 x 1/1 (75mm deep)
Construction			
Exterior	0.7mm stainless steel	0.7mm stainless steel	0.7mm stainless steel
Interior	0.7mm stainless steel	0.7mm stainless steel	0.7mm stainless steel
Door	0.7mm stainless steel	0.7mm stainless steel	0.7mm stainless steel
Power Supply	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug
Power Input			
Start Up	8.25 amps	10.7 amps	10.7 amps
Running	1.5 amps	2.2 amps	2.2 amps
Compressor HP	1/5	1/4	1/4
Energy Consumption (Tested to EN153) in 24hrs	2kW	2.9kW	3.2kW
Heat Rejection (Evaporating at -10°C in 32°C ambient)	330watts	565watts	565watts
Refrigerant	R134a	R134a	R134a
Defrost	Auto off- cycle	Auto off- cycle	Auto off- cycle
Insulation ODP Zero Polyurethane	75mm	75mm	75mm
Noise Output	45dBA	45dBA	45dBA
Fittings			
Drawers	2	2	4
Containers (75 mm deep)	1 x 2/1 GN container	1 x 2/1 GN container	1 x 2/1 GN container
Chargrill/Griddle	Accommodates 1 600mm unit (not included)	Accommodates 2 600mm units (not included)	Accommodates 2 900mm units (not included)



Bryggen Road, North Lynn Industrial Estate
King's Lynn, Norfolk PE30 2HZ

T +44 (0) 1553 817000

F +44 (0) 1553 817111

Spares +44 (0)1553 817017

E info@williams-refrigeration.co.uk

W www.williams-refrigeration.com

All refrigeration equipment requires adequate ventilation for efficient and effective performance. Williams are committed to a policy continuing product development and innovation and as such, we reserve the right to change product specifications stated without prior notice.