


PW4 Prep Well

Model: PW4 - Datasheet



Key Features

- Foodsafe stainless steel exterior and interior
- Designed to accommodate 1/3 and 1/6 GN containers in pan holders
- Includes space saving worktop / chopping board
- Environmentally sound Hydrocarbon refrigerant has a low GWP / zero ODP, energy consumption is reduced by 15% due to its excellent thermodynamic properties
- CoolSmart controller is designed for easy operation and features clear digital display
- Designed and engineered to operate efficiently up to a 32°C ambient, this exceeds Climate Class 4
- Precision injected, high density 30mm polyurethane insulation. Provides excellent thermal efficiency with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential)
- Heavy duty, non-marking swivel castors with brakes for mobility and ease of positioning
- High performance, efficient commercial refrigeration system for increased energy efficiency and quieter improved performance
- Designed to prolong preparation periods by reducing the temperature rise of ingredients whilst the lid is removed
- Unique air flow design with protective 1°C air curtain ensures food temperature in pans is maintained at between 1°C to 4°C, when the cutting board / worktop is in place
- Removable, easy to clean worktop / chopping board, crumb tray and lift off night cover
- Removable internal fittings including pan supports for easy cleaning and hygiene
- Designed for positioning next to existing wall benches and tables

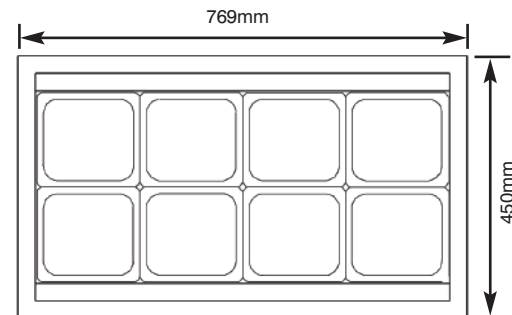

Variant	Temp	Storage
PW4	+1/+4°C	General Produce

Options

- 1/3 x 150mm Gastronorm pans
- 1/6 x 150mm Gastronorm pans

Dimensions

	PW4
External (mm):	H870 excluding lid (882mm including lid) W450 D769
Internal (mm):	H179 W305 D709
Door Opening (mm):	N/A
Packed:	H902 W470 D790
Weight: Add 5kg per product for packaging	60kg

Important Information

	PW4
Capacity: 1/3 or 1/6 pans	4 x 1/3 or 8 x 1/6 pans
Construction	
Exterior	0.7mm stainless steel
Interior	0.6mm stainless steel
Door	0.7mm stainless steel
Power Supply	220V/240V 50Hz/1Ph 13 amp plug
Power Input	
Start Up	7 amps
Running	1.2 amps
Compressor HP	1/5
Energy Consumption (Tested to EN153) in 24hrs	3kW
Heat Rejection (Evaporating at -10°C in 32°C ambient)	498watts
Refrigerant	R290
Defrost	Hot gas defrost
Insulation ODP Zero Polyurethane	30mm
Fittings	
1/6 Pans (not included)	8
1/3 Pans (not included)	4
Cutting Board	



Bryggen Road, North Lynn Industrial Estate
King's Lynn, Norfolk PE30 2HZ

T +44 (0) 1553 817000

F +44 (0) 1553 817111

Spares +44 (0)1553 817017

E info@williams-refrigeration.co.uk

W www.williams-refrigeration.com